This Page Is Inserted by IFW Operations and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 4:	1	The state of the s		
(51) International Patent Classification 4:		(11) International Publication Number:	WO 86/ 03676	
A61K 9/50, B01J 13/02	A1	. Tanana i tambéi	11 0 60/ 030/6	
AUIR 9/30, BUIJ 13/02	AI	(43) International Publication Date:	3 July 1986 (03.07.86)	
			3 July 1980 (03.07.86)	
·				

(21) International Application Number: PCT/US85/02492 (74) Agents: RYAN, Andrea, M. et al.; Brumbaugh, Graves, Donohue & Raymond, 30 Rockefeller Plaza, New (22) International Filing Date: 17 December 1985 (17.12.85) York, NY 10112 (US).

(31) Priority Application Number: (81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), DK, FI, FR (European patent), GB (European patent), HU, IT (European patent), JP, KR, LU (European patent), NL (European patent), 684,457 (32) Priority Date: 21 December 1984 (21.12.84) (33) Priority Country:

(71) Applicant: THE OHIO STATE UNIVERSITY RE-SEARCH FOUNDATION [US/US]; 1314 Kinnear Road, Columbus, OH 43212 (US).

(72) Inventors: BRODIN, Arne, Folke; Gillestigen 29, S-151 52 Södertälje (SE). DING, Shulin; 51 South Barker Avenue, Apt. D, Evansville, IN 47712 (US). FRANK, Sylvan, Gerald; 1910 Wyandotte Road, Columbus, OH 43212 (US).

NO, SE (European patent).

Published

With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: SMALL PARTICLE FORMATION AND ENCAPSULATION

(57) Abstract

Process for the formation and the simultaneous encapsulation of small particles of a compound from solution which comprises: (a) dissolving said compound in a first solvent; (b) preparing a solution of encapsulating material and an electrolyte in a second solvent which is miscible with the first solvent and in which the compound to be encapsulated is more or less insoluble, in an amount which is effective, but present in an amount just insufficient to cause coacervation of the encapsulating material without interacting with it; (c) mixing the solutions from step (a) and (b) while stirring to cause the concurrent precipitation of the compound as small particles and formation of a coacervate of the encapsulating material; and (d) gelling the encapsulating material.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT AU BB BE BG BR CF CG CH DE DK	Austria Australia Barbados Belgium Bulgaria Brazil Central African Republic Congo Switzerland Cameroon Germany, Federal Republic of Denmark Finland	GA GB HU IT JP KP KR LI LK LU MC MG ML	Gabon United Kingdom Hungary Italy Japan Democratic People's Republic of Korea Republic of Korea Liechtenstein Sri Lanka Luxembourg Monaco Madagascar Mali	MR MW NL NO RO SD SE SN SU TD TG US	Mauritania Malawi Netherlands Norway Romania Sudan Sweden Senegal Soviet Union Chad Togo United States of America
----------------------------------	---	--	--	--	---

Description <u>Small Particle Formation and Encapsulation</u>

The present invention is concerned with the simultaneous formation and encapsulation of small particles from solutions of compounds whose solubility is greater in one solvent than in another. The process is preferably used to prepare a readily soluble encapsulated pharmaceutically active compound.

Background of the Invention

- 10 From a pharmaceutical point of view, the smaller the particle size of a relatively insoluble drug the greater is its rate of solution and as a rule, the greater is its bioavailability (J.H. Fincher, J. Pharm. Sci., 57, 1825 (1968)). To this end, small
- particles are conventionally formed by mechanical subdivision of bulk matter or by aggregation of small molecules or ions (D.J. Shaw, "Introduction to Colloid and Surface Chemistry", 3rd Ed., Butterworths, London, 1980, Chapter 1). The production and applications of
- microcapsules for medical and technical use have been extensively reviewed (L.A. Luzzi, J. Pharm. Sci., 59, 1367 (1970); A. Kondo, "Microcapsule Processing and Technology", Marcel Dekker, New York (1979); J.E. Vandegaer, "Microencapsulation: Processes and Appli-
- 25 cations", Plenum Press, New York (1976); J.R. Nixon,
 "Microencapsulation", Marcel Dekker, New York (1976);
 J.A. Bakan and J.L. Anderson, in "The Theory and
 Practice of Industrial Pharmacy", Second Ed., (Ed. L.
 Lachman, et al.), Lea & Febiger, Philadelphia, 1976,
- 30 p. 420; M.H. Gutcho, "Microcapsules and Microencapsulation Techniques", Noyes Data Corp., New Jersey, (1976)).

Summary of the Invention

A method has now been found which involves the formation of small core particles of an active compound from solution and the concurrent encapsulation of the core particles in a coacervate of the encapsulating material when the solvent system is altered. This process of encapsulation of an active compound in a natural or synthetic polymer protects and stabilizes the active core compound.

The new method for encapsulating organic compounds whose solubility varies significantly from one solvent system to another comprises:

- (a) dissolving said compound in a first
 aqueous or nonaqueous solvent;
- 15 (b) preparing a solution of encapsulating material and an electrolyte in a second solvent which is miscible with the first solvent and in which the compound to be encapsulated is more or less insoluble, in an amount which is effective (but present in an 20 amount just insufficient) to cause coacervation of the encapsulating material without interacting with it;
- (c) mixing the solutions from step (a) and(b) while stirring to cause the concurrent precipitation of the compound as small particles and formationof a coacervate of the encapsulating material;
 - (e) gelling the encapsulating material; and
- (f) hardening the encapsulating material. If necessary to cause precipitation additional quantities of the electrolyte used in step (b) may be 30 added.

After the first encapsulation the microcapsules can be redispensed and a second wall can be deposited over the first.

In this process, coacervation of the encapsulating material is believed to result from the change of solvent character of the solution, which disturbs the system, when taken together with the electrolyte initially present and causes coacervation.

30

Suitable pharmaceutically active compounds whose solubility decreases from one solvent system to another, are, for example, budesonide, felodipine, bacampicillin, griseofulvin, indomethacin, erythromycin, theophylline, salicylic acid, nifedipine, remoxipride, chlorzoxazone, lidocaine and alaproclate.

A suitable encapsulating material which will form a coacervate is, for example, gelatin (preferably of the type B; acid processed), methylcellulose, hydroxy10 propyl methylcellulose, sodium carboxymethylcellulose, ethylcellulose, cellulose acetate phthalate and polyvinylpyrrolidone. A suitable electrolyte which is effective to cause coacervation of the encapsulating material without interacting with it is, for example, sodium sulfate solution, preferably a 530% aqueous solution which may also contain a suitable cosolvent, for example, an alcohol or a wetting agent at about 0-10%. The compound, encapsulating material, wetting agent and electrolyte can be combined in step (a) in ratios of about (0.1-6):(0.1-4):(0.1-10):(0.4-48).

The gelling of the encapsulating material can be achieved by treatment of the encapsulating material with cold (5°C) Na₂SO₄ solution. If polyvinyl-pyrrolidone is used as the encapsulating material gelling can also be achieved by a number of other methods, for example:

- application of heat (to 60°C);
- addition of hydrochloric acid, 0.05N 1.ON (10 ml 0.1M HCl/ml) to the mixture to be gelled;
- 3. application of heat (40-45°C) plus addition of sodium sulfate solution;
- application of heat plus addition of hydrochloric acid;
- 5. application of heat (40-45°C) plus addi-35 tion of hydrochloric acid and sodium sulfate.

If ethylcellulose is used as the encapsulating material temperature change can be used to cause coacervation of the ethylcellulose.

Once formed, the gelled or "unhardened" microcapsules can be hardened by first centrifuging a suspension of the microcapsules to produce a concentrated suspension. The concentrated microcapsules are washed twice with water by redispersing and centrifuging. The washed microcapsules are then redispersed in water, formaldehyde solution or glutaraldehyde solution is added and the suspension allowed to stand at room temperature for 15-20 hours. The suspension is centrifuged, the microcapsules washed twice with water, following which they are dehydrated by being redispersed in a water/isopropanol (or other suitable alcohol) mixture, filtered, washed twice with alcohol, filtered and dried. The encapsulated particles formed by this process are less than 100 µm, preferably less than 10 µm; and the core particles are less than 25 μ m, preferably less than 1 μ m.

In an alternate embodiment, a suitable acid may be used to convert the free base of a compound to its salt form or for the free acid to be converted to the salt form by the addition of a base, prior to step (b).

For some applications a double wall microcapsule is useful. In forming a double wall, the single walled microcapsule is redispersed and a second wall is deposited over the first.

Detailed Description of the Invention

According to one embodiment of the invention, the process comprises the following steps which are performed at about 55°C.

- (a) dissolving a pharmaceutically active compound in a first solvent;
- (b) adding to the solution obtained in step a, a solution of gelatin and sodium sulfate in a second solvent which is miscible with the first solvent and in which the active compound is more or less insoluble while keeping the solution under constant

agitation which results in a suspension of encapsulated pharmaceutically active small particles and coacervation of the gelatin; and

- (c) adding a solution of sodium sulfate.
 5 The suspension is then poured into cold sodium sulfate solution and stirred at the temperature of an ice bath. This procedure causes "gelling" of the liquid gelatin shell of the microcapsules. The microcapsules are then collected, for instance, by centrifugation;
- (d) the suspension is centrifuged and washed twice with water, centrifuged, dispersed into water, formaldehyde or glutaraldehyde solution is added under stirring which is continued for several hours, or the suspension can be allowed to stand at room temperature. This procedure causes hardening of the gelled microcapsule shell. The suspension is centrifuged, the microcapsules washed twice with water, redispersed in water with stirring, isopropanol added, filtered, washed twice with isopropanol, filtered and dried. This procedure causes dehydration of the hardened microcapsules. The formaldehyde should be added as a 5-37% solution, preferably a 37% (w/w)
- water can be 5-50% (w/w) isopropanol.

 The process of forming microcapsules according to this invention can be illustrated by the following examples.


solution. The alcohol can be any water-miscible alcohol, preferably isopropanol, and the mixture with

£,

Example 1

A solution consisting of 0.38 g felodipine and 2.0 ml of polyethylene glycol 400 was kept under constant agitation with a magnetic stirrer while a solu-5 tion consisting of 1.25 g gelatin (type B:acid processed), 4 g of sodium sulfate and 50 ml of water was added. This procedure resulted in a white suspension of microencapsulated felodipine particles. An additional 50 ml of 20% sodium sulfate solution was added 10 and the suspension was then stirred for an additional 15 minutes, following which it was poured into 200 ml of cold (5°C) 7% sodium sulfate solution, and stirred for 30 minutes at ice-bath temperature. This procedure caused gelling of the liquid gelatin shell of the 15 microcapsules. The suspension of gelled microcapsules was centrifuged and washed twice with water by redispersing and centrifuging. The microcapsules were redispersed in 50 ml of water, 5 ml of 37% formaldehyde solution added under stirring and the suspension 20 allowed to stand at room temperature for 15-20 hours. This procedure caused hardening of the "gelled" gelatin shell of the microcapsules. The suspension was centrifuged and the microcapsules were washed again twice with water, following which they were redis-25 persed in 10 ml of water with stirring and 50 ml of isopropanol added slowly. The suspension was filtered and washed twice with 50 ml of isopropanol, filtered and dried in an oven at 35°C. This procedure caused dehydration of the hardened capsules. The dry micro-30 capsules were stored in well-closed containers at room temperature. The entire process was monitored by observation of samples in the optical microscope. The microcapsules were of asymmetric appearance and of a size less than 10 µm.

A schematic diagram of the entire process according to Example 1 is illustrated below:

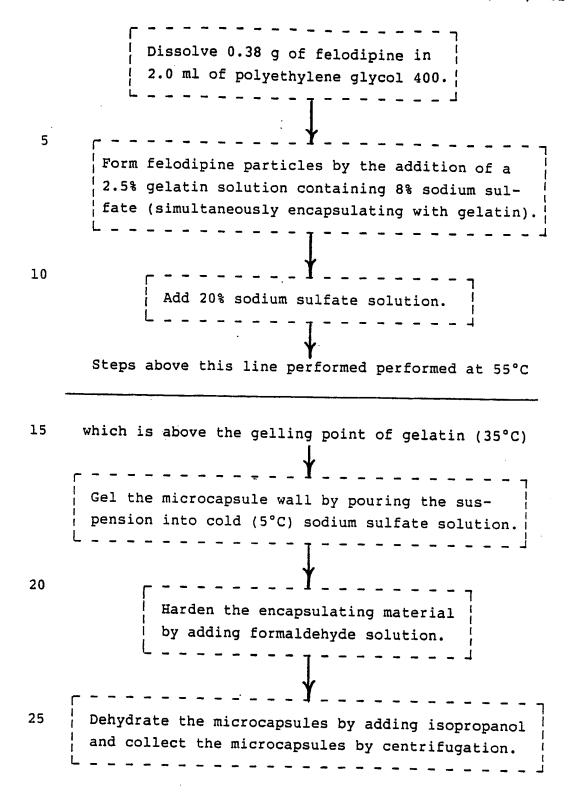

15

Example 2

A solution consisting of 0.7 g of budesonide in 2 ml of N,N-dimethylformamide was freshly prepared. While this solution was held under constant agitation (500 rpm) with a magnetic stirrer, a second solution consisting of 50 ml of 2% methylcellulose and 6 ml of 20% sodium sulfate was added. The stirring speed was changed to 1270 rpm immediately after mixing the two solutions and stirring was continued at room temperature for 15 minutes. The microencapsulated budesonide particles were collected by centrifugation, washed twice with 25 ml of water, and freeze-dried. Both methylcellulose 25 cps (Dow Chemical Co.) and METHOCEL A 15LV Premium (Dow) were studied.

The entire procedure was monitored by observation of samples in the optical microscope. A schematic diagram of the process is illustrated below:

Dissolve 0.7 g budesonide in 2 ml of N,N-dimethyformamide.

5

Form budensonide particles by the addition of a solution consisting of 50 ml of 2% methylcellulose and 6 ml of 20% sodium sulfate (simultaneously encapsulated with methylcellulose).

10


15

The microcapsules were collected by centrifugation, washed with water, and freeze-dried.

Example 3

The procedure for the preparation of hydroxypropyl methylcellulose microcapsules was similar to that for the methylcellulose microcapsules described 5 in Example 2. A solution consisting of 0.35 g of budesonide in 1 ml of N,N-dimethylformamide was freshly prepared. While this solution was held under constant agitation (500 rpm) with a magnetic stirrer, a second solution consisting of 100 ml of 0.5% hydroxy-10 propyl methylcellulose (METHOCEL F4M Premium, Dow) and 22 ml of 20% sodium sulfate was added. The stirring speed was changed to 1270 rpm immediately after mixing the two solutions and stirring was continued at room temperature for 20 minutes. The microencapsulated 15 budesonide particles were collected by centrifugation, washed twice with water (50 ml and 20 ml in sequence), and freeze-dried.

The entire procedure was monitored by observation of samples in the optical microscope. A schematic 20 diagram of the process is illustrated below:

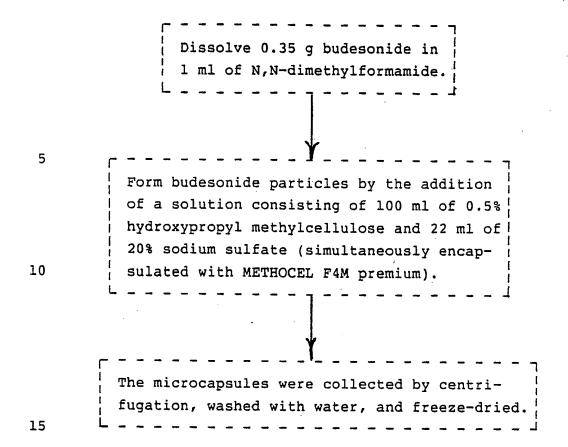

Example 4

Single-wall methylcellulose microcapsules were prepared first by the process described in Example 2 using methylcellulose 25 cps (Ruger Chemical Co.).

5 After the single wall microcapsules were collected by centrifugation and washed once with 25 ml of water, they were redispersed in 10 ml of water and mixed with 40 ml of 0.625% hydroxypropyl methylcellulose solution (METHOCEL F4M Premium, Dow). While under constant agitation (800 rpm) with a magnetic stirrer, 13.5 ml of 20% sodium sulfate solution was added dropwise. The stirring was continued at 800 rpm for 3 minutes and at 200 rpm for an additional 20 minutes. The microcapsules were collected by centrifugation, washed twice with 25 ml of water, and freeze-dried.

The entire procedure was monitored by observation of samples in the optical microscope. A schematic diagram of the process is illustrated below:

Dissolve 0.7 g budesonide in 2 ml of N,N-dimethylformamide. 5 Form budesonide particles by the addition of a solution consisting of 50 ml of 2% methylcellulose and 6 ml of 20% sodium sulfate 10 (simultaneously encapsulated with methylcellulose). The microcapsules were collected 15 by centrifugation, washed once with 25 ml of water, and redispersed in 10 ml of water. 20 Add 40 ml of 0.625% hydroxyporpyl methylcellulose solution. 25 Add 13:5 ml of 20% sodium sulfate solution drop-wise to cause coacervation. 30 The double-walled microcapsules were collected by centrifugation, washed with water, and freezed-dried.

Example 5

A solution of ethylcellulose in cyclohexane was prepared by heating and stirring the desired amount of ethylcellulose (ETHOCEL 100 cps, Dow) and surfactant in 20 ml of cyclohexane. When the ethylcellulose and surfactant were dissolved and the temperature was above 75°C, this hot solution was poured immediately into a suspension of microcapsules freshly prepared by sonicating 0.2 g of dry single-wall microcapsules in 5 ml of cyclohexane for one minute. The single wall microcapsules used in this Example were coated with methylcellulose 25 cps (Ruger Chemical Co.) according to the process described in Example 2.

The mixture was first stirred at room temperature

at a speed of 400 rpm. After cooling down to 25-28°C
(approximately 30 minutes), it was placed in a 10°C
water bath, stirred for 5 more minutes, and then mixed
with 25 ml of hexane. This mixture was continuously
stirred at 400 rpm for another 5 minutes. The resul
tant double wall microcapsules were washed twice with
25 ml of hexane by decanting the supernate, and collected by filtration. The microcapsules were dried in
air overnight and then in a reduced-pressure oven at
40°C for 30 minutes. A schematic diagram of the process is illustrated below:

Disperse 0.2 of dry Dissolve ethylcellulose single-walled methyland surfactant in 20 ml cellulose microcapsules of cyclohexane by stir-5 in 5 ml of cyclohexane ring and heating up to by sonication for one 75°C. minute. 10 Mixing. Gradually cool down to 25-28°C by stirring at room temperature. 15 Quickly cool down to 10°C by placing the mixture in a 10°C water bath. 20 Add 25 ml of hexane. Decant the supernate and wash the micro-25 capsules twice with 25 ml of hexane. Collect the microcapsules by filtration. 30 Dry the microcapsules in the air overnight then in a reduced-pressure oven (40°C) for 30 minutes

5

10

30

Claims

- 1. A process for encapsulating an organic compound whose solubility is greater in a first solvent than in a second solvent which process comprises:
 - (a) dissolving said compound in a first solvent:
 - (b) preparing a solution of encapsulating material and an electrolyte in a second solvent which is miscible with the first solvent and in which the compound to be encapsulated is more or less insoluble, in an amount which is effective, but which electrolyte is present in an amount just insufficient to cause coacervation of the encapsulating material without interacting with it;
- (c) mixing the solutions from step (a) and (b) while stirring to cause the concurrent precipitation of the compound as small particles and formation of a coacervate of the encapsulating material; and
- 20 (d) gelling the encapsulating material.
 - 2. A process according to claim 1 wherein the encapsulated material is hardened.
- 3: A process according to claim 1 wherein the encapsulated material is redispersed in a liquid and encapsulated in a different encapsulating material.
 - 4. A process according to claim 1 wherein additional electrolyte is added after step (b) to cause concurrent precipitation of the compound as small particles and formation of a coacervate of the encapsulating material.

- A process according to claim 1 wherein the compound is pharmaceutically active.
- 6. A process according to claim 1 wherein a wetting agent is used in step a.
- 5 7. A process according to claim 1 wherein, if needed, the temperature is controlled in step c.
 - 8. A process according to claim 1, wherein the pharmaceutically active compound is selected from the group consisting of budesonide and felodipine.
- 10 9. A process according to claim 1, wherein the encapsulating material is selected from the group consisting of gelatin, methylcellulose, hydroxypropyl methylcellulose, sodium carboxymethylcellulose, cellulose acetate phthalate, ethylcellulose, and polyvinylpyrrolidone.
 - 10. A process according to claim 7, wherein the ratio of encapsulating material to wetting agent to electrolyte is about (0.1-6):(0.1-4):(0.1-10):(0.4-48).

INTERNATIONAL SEARCH REPORT

International Application No PCT/US 85/02492

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, Indicate all) 6						
According	g to International Patent Classification (IPC) or to both N	lational Classification and IDC				
IPC4: A 61 K 9/50; B 01 J 13/02						
II. FIELD	S SEARCHED					
	Minimum Docum	Pentation Searched 7	<u></u>			
Classificati	on System		 			
Classification Symbols A 61 K IPC B 01 J						
	i					
	Documentation Searched other	r than Minimum Documentation hts are included in the Fields Searched *				
			·			
III. DOCL	IMENTS CONSIDERED TO BE RELEVANT					
Category *	Citation of Document, 11 with Indication, where a	ppropriate, of the relevant passages 12	Relevant to Claim No. 13			
A	FR, A, 2243018 (SPIEGL) see page 3, line 19 - claims	page 4, line 36;	·			
P,A	P,A EP, A, 0130162 (THE OHIO STATE UNIVERSITY RESEARCH FOUNDATION) 2 January 1985, see page 2, line 20 - page 9, line 21; claims					
		·				
 Special categories of cited documents: 10 "A" document defining the general state of the art which is not considered to be of particular relevances "E" earlier document but published on or after the international filing date invention "L" document which may throw doubts on priority claim(s) or which is cited to estaclish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "It later document published after the international filing date or priority date and not in conflict with the application but clied to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents; such combination being obvious to a person skilled in the art. "A" document member of the same patent family 						
Date of the Avid Co.						
2nd	April 1986	Date of Mailing of this International Sea	1986			
International Searching Authority Signature of Authorized Officer						
EUROPEAN PATENT OFFICE M. VAN MOL						

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON

INTERNATIONAL APPLICATION NO.

PCT/US 85/02492 (SA 11744)

This Annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 10/04/86

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
FR-A- 2243018	04/04/75	DE-A- AT-A,B CH-A-	2441890 324281 604883	13/03/75 25/08/75 15/09/78
EP-A- 0130162	02/01/85 .	WO-A- AU-A- GB-A- JP-T-	8500105 3108884 2152466 60501595	17/01/85 25/01/85 07/08/85 26/09/85